

Jacket & Insulation Removal Combo Tools





Infinity Series



US01 600V-35kV Adjustable Cable Mid-Span Stripper

- Adjusts from 0.5" to 2.5" (12.7 to 63.5 mm) cable diameters
- Efficiently & accurately strips jacket & insulation materials on 600V to 35 kV primary & secondary cable
- Equipped with detachable, ergonomic handles to accommodate tight spaces
- Optional blade depth gauge provides positive depth control while making blind cuts during mid-span applications
- Blade depth & angle are adjustable for versatility
- Patent-pending design aligns cable & maintains optimum blade position for precise cuts
- Applications include mid-span & end stripping of aerial tree wire & spacer cables
- Standard & EPR optimized blades easily accommodate various jacket & insulation materials

MODEL	PART #	CABLE O.D.	JACKET MATERIALS	INSULATION	BLADE PART #	LENGTH	WEIGHT
US01 Standard	US01-7000	0.5" - 2.5" (12.7 - 63.5 mm)	URD / PE / PVC / LC Shield / Copper Tape Shield / Flat Strap	XLPE / PE	US01-7501	12" (304.8 mm)	3 lb (1.36 kg)
US01 w/ Ball Handles	US01-7001						
US01 w/ Depth Gauge	US01-7002	0.5" - 2.5" (12.7 - 63.5 mm)	URD / PE / PVC / LC Shield / Copper Tape Shield / Flat Strap	EPR	US01-7505	N/A	N/A
US01 (EPR Optimized)	US01-7005						
Blade Depth Gauge Kit	US01-7504	N/A	N/A	N/A	N/A	N/A	N/A

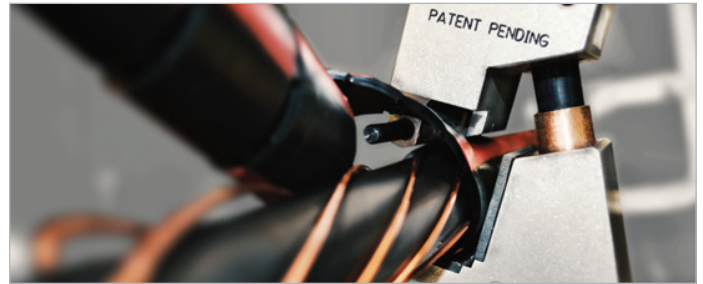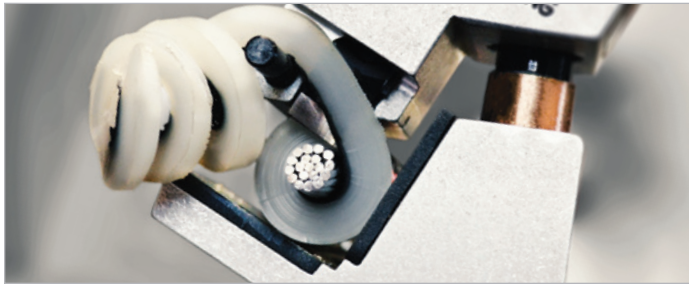

WS 64 Series



5-35 kV Adjustable Cable Jacket & Insulation Stripper

- Compact, universal tool for stripping the end or mid-span on cable outer jackets & insulation materials with diameters from 0.5" to 2.5" (12.7 mm to 63.5 mm)
- "Dual-position" jaw is versatile for removing outer jackets on primary power cables with all major insulation shields
- Suitable for secondary & primary cable insulations
- Blade design provides an easy & efficient stripping operation with minimal effort, as well as a spring-loaded trigger-action jaw for quick cable diameter adjustments
- Rugged, all metal construction & micro adjustable blade for a variety of jacket thicknesses
- U.S. Patent No. D437,765



OUTER JACKET O.D.	INSULATION / COVERING THICKNESS	STRIPPING ACCESS	MODEL	PART #	BLADE MODEL / PART #	LENGTH	WEIGHT
0.5" - 2.5" (12.7 - 63.5 mm)	175 mils (4.4 mm)	End	WS 64-U-E	37296	CB 50K 37284	8" (200 mm)	1.9 lb (860 g)
		Mid-Span	WS 64-U-M	37297	CB 236 37299		
		Mid-Span & End	WS 64-U-EM	37295	CB 50K / CB 236 37284 / 37299		
	345 mils (8.8 mm)	Mid-Span	WS 64-U-M260	37174	CB 260 42395		



WS 50 & WS 50A Series



5-46 kV Adjustable Jacket & Insulation Stripper

- Engineered for use on 1/0 AWG to 1000 kcmil URD cable without damaging the conductor
- Dual-handle design provides safe & easy stripping operation on all thicknesses of XLPE, plastic, polyethylene & EPR insulations
- Equipped with an adjustable strip stop bar for exact stripping lengths that is also removable to allow for unlimited stripping operations



MODEL	PART #	CABLE O.D.	BLADE TYPE	MODEL / PART #	LENGTH	WEIGHT
WS 50	30700	0.5" - 2.25" (12.7 - 57.15 mm)	Long Reach	CB 50 30703	14.5" (368 mm)	2.1 lb (953 g)
WS 50A	30713	0.5" - 2.25" (12.7 - 57.15 mm)	Standard Reach	CB 50A 30712		

Jacket & Insulation Removal Combo Tools

PROVITEL®
UtilityTool®


WS 70 Series



46-69 kV Adjustable Jacket & Insulation Stripper

- Versatile & rugged tool engineered to strip outer jackets & insulating materials on cable diameters from 1.9" to 3.65" (48 to 93 mm)
- Blade designed to increase control during the stripping operation
- Dual-handle design provides greater stripping leverage to reduce hand strain
- Blade features fine adjustment

MODEL	PART #	CABLE O.D.	BLADE MODEL / PART #	LENGTH	WEIGHT
WS 70	42040	1.9" - 3.65" (48 - 93 mm)	CB 265 42042	17.5" (444 mm)	3.3 lb (1.5 kg)

WS 57 & 57A Series



45-115 kV Adjustable Jacket, Insulation & Semi-Con End Stripper


- Engineered to strip the outer jacket & insulation from cable diameters from 2.0" to 4.25" (50.8 to 108 mm)
- Features a quick-slide adjustment mechanism that easily accommodates various cable diameters
- Adjustable blade depth & angle provides control over the width of the end strip

WS 57A

Equipped with standard jacket stripping blade

WS 57A

Equipped with an adjustable semi-con shaving blade system for additional functionality

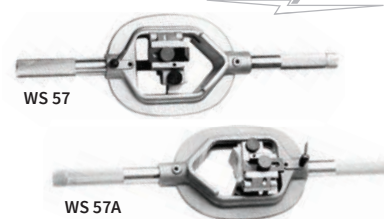

MODEL	PART #	CABLE O.D.	INSULATION MATERIALS	JACKET STRIPPING BLADE MODEL / PART #	SEMI-CON SHAVING BLADE MODEL / PART #	LENGTH	WEIGHT
WS 57	34320	2.0" - 4.25" (50.8 - 108 mm)	XLPE / Polyethylene / EPR	CB 144 34327	N/A N/A	24" (610 mm)	7 lb (3.18 kg)
WS 57A	34735	2.0" - 4.25" (50.8 - 108 mm)	XLPE / Polyethylene / EPR	CB 144 34327	40X 21715		

Jacket Removal



WS 61 Series


UtilityTool®

Adjustable URD Cable Jacket Stripper

- Engineered for safely stripping encapsulated jackets on #2 AWG to 1,000 kcmil URD cables & is ideal for removing tough polyethylene encapsulated jackets
- Blade adjustment provides precise positioning & prevents damage to underlying concentric conductors

MODEL	PART #	CABLE O.D.	BLADE MODEL / PART #	LENGTH	WEIGHT
WS 61	34720	Up to 2.25" (57.15 mm)	CB 155K 34733	14.5" (368 mm)	2.1 lb (953 g)



WS 58 Series


UtilityTool®

Adjustable Cable End Stripper

- Equipped with a fast, slide-action adjustment mechanism to fit a wide range of cable outer diameters from 0.625 to 1.625 (15.88 to 41.28 mm) without damaging the conductor
- Convenient two-handle design provides greater leverage & stripping efficiency

MODEL	PART #	CABLE O.D.	BLADE MODEL / PART #	LENGTH	WEIGHT
WS 58	34360	0.625" - 1.625" (15.88 - 41.28 mm)	CB 100 34294	16.5" (419 mm)	2.1 lb (953 g)

WS-MSES Series



Tap & Riser Wire Mid-Span Stripper

- Efficient polyethylene covering removal tool for stripping the mid-span & ends on primary voltage tap & riser wires
- Removes a section of the cable jacket at the mid-span to easily clamp to lightning arrestors
- Unique spring-loaded locking bolt opens the tool body halves for quick positioning onto the cable
- Convenient pull ring located at the end of the locking bolt attaches to tool belts & pouches

UtilityTool®


CABLE SIZE	INSULATION THICKNESS	MODEL	PART #	BLADE MODEL / PART #		LENGTH	WEIGHT
#2	110 mil	WS-MSES #2 110 mil	37388	CB 223	37111	4.25" (108 mm)	15 oz (426 g)
	150 mil	WS-MSES #2 150 mil	37730	CB 256	37803		
#4 (Solid)	110 mil	WS-MSES #4 Solid 110 mil	38060	CB 223	37111		
#4	110 mil	WS-MSES #4 110 mil	37380				
	150 mil	WS-MSES #4 150 mil	37715	CB 256	37803		
#6 (Solid)	110 mil	WS-MSES #6 Solid 110 mil	37384	CB 223	37111		
#6	150 mil	WS-MSES #6 150 mil	37800	CB 256	37803		

PROVITEL®

[vendas@provitel.com.br](mailto: vendas@provitel.com.br) | www.provitel.com.br
 PROVITEL Telecomunicação e Eletricidade Ltda.
 São Paulo - SP | Fone & Fax: 11 2239-1484

Onde as
melhores
marcas se
encontram

Visit www.ripley-tools.com for more information & product selection | 5